YAMAHA N-MAX 125 (2025)

3630/EX 3633/LS





PROCEDERE SMONTANDO IL PARABREZZA ORIGINALE IN TUTTE LE SUE PART: LASTRA E 4 VITI.


QUINDI PROCEDERE ALL ' INSERIMENTO DEI 4 PASSACAVI FORNITI NEI RELATIVI FORI DI FISSAGGIO DEL PARABREZZA FABBRI. LE BOCCOLE METALLICHE FUNGERANNO DA DISTANZIALE TRA IL PASSACAVO E IL FISSAGGIO SULLO SCOOTER.

INSERIRE IL DISTANZIALE IN NYLON, POI LA RONDELLA ø30 E LA VITE M5X35 E FISSARE IL PARABREZZA, QUINDI AGGIUNGERE IL TAPPO DI COPERTURA

PROCEED BY DISASSEMBLING THE ORIGINAL WINDSCREEN IN ALL ITS PARTS: PLATE AND 4 SCREWS.

THEN PROCEED TO INSERT THE 4 PROVIDED GROMMETS IN THE APPROPRIATE FIXING HOLES OF THE FABBRI'S WINDSCREEN. THE METAL BUSHINGS WILL ACT AS A SPACER BETWEEN GROMMETS AND FIXATIONS ON THE SCOOTER.

INSERT THE NYLON SPACER, THEN THE WASHER ø30 AND SCREW M5X35 AND FIX THE WINDSCREEN, THEN ADD THE COVER CAP

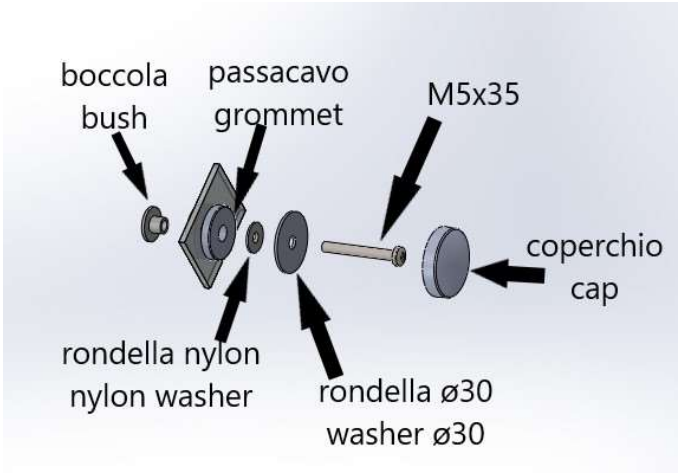

Gen-X® è un marchio registrato

F.FABBRI ACCESSORI s.r.l.
Via del Mangano 9 - 40023 Castel Guelfo di Bologna (BO) - ITALY
Tel. +39 0542 670236 - +39 0542 670201
www.fabbriaccessori.com - e-mail: info@fabbriaccessori.com